

## LED Driver

## LNV-320W Series / LNV-□V320W□AA

## LNV



## Highlights &amp; Features

- Designed for single phase (for L – N) or two phase (for L – L) wide input 180-528Vac
- Up to 94.0% efficiency
- 6kV common mode & 4kV differential mode surge immunity
- Active PFC. Meets IEC/EN 61000-3-2, Class C
- Adjustable voltage & current; dimming options available
- IP65 or IP67 options for indoor and outdoor applications

## Safety Standards



## Package Type



A



B



D

## Model Number:

LNV-□V320W□AA

## Unit Weight:

1.19 kg (2.62 lb)

## Dimensions (L x W x D):

262 x 90 x 43.8 mm  
(10.32 x 3.54 x 1.72 inch)

## General Description

Delta LNV series of LED drivers comes with different combinations of features to suit different application requirements and energy optimization needs. Options include externally adjustable output voltage and current levels, and adjustment of LED brightness via 3-way built-in dimming function. All models in the LNV series come with full corrosion resistant aluminum casing, major international safety certifications. The products are designed and rigorously tested to work in various indoor and outdoor LED lighting conditions. High surge immunity (common mode: 6kV, differential mode: 4kV), MTBF > 700,000hrs and compliance to IP65/IP67, all make the Delta LNV series an essential part of an energy efficient LED lighting power solution for both indoor and outdoor applications.

## Model Information

## LNV LED Driver

| Model Number   | Input Voltage Range        | Rated Output Voltage | Rated Output Current |
|----------------|----------------------------|----------------------|----------------------|
| LNV-12V320W□AA | 180-528Vac (LNV-□V320W□AA) | 12Vdc                | 22.50A               |
| LNV-24V320W□AA |                            | 24Vdc                | 13.40A               |
| LNV-36V320W□AA |                            | 36Vdc                | 8.90A                |
| LNV-48V320W□AA |                            | 48Vdc                | 6.70A                |

## Model Numbering

| LN         | V –                                      | □V                                         | 320W                                | □                                                                                                                                                                                                                 | A                                  | A                              |
|------------|------------------------------------------|--------------------------------------------|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|--------------------------------|
| LED Driver | Product Series<br>V – Input high voltage | Output Voltage<br>12V<br>24V<br>36V<br>48V | Output Power<br>(320W series model) | Package Type<br>A – IP65 with potentiometers to adjust output voltage & constant current level<br>B – IP67 without dimming cable & potentiometers<br>D – IP67 with dimming cable to adjust constant current level | Safety Approval<br>A – UL approval | Variable<br>A – Delta standard |

**LED Driver**

LNV-320W Series / LNV-□V320W□AA

**Specifications**

| Model Number | LNV-12V320W□ | LNV-24V320W□ | LNV-36V320W□ | LNV-48V320W□ |
|--------------|--------------|--------------|--------------|--------------|
|--------------|--------------|--------------|--------------|--------------|

**Input Ratings / Characteristics**

|                                 |                                                                                                                                                                                                                                                               |            |            |            |            |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|------------|------------|
| Nominal Input Voltage           | 200-480Vac                                                                                                                                                                                                                                                    |            |            |            |            |
| Input Voltage Range*            | 180-528Vac                                                                                                                                                                                                                                                    |            |            |            |            |
| Nominal Input Frequency         | 50-60 Hz                                                                                                                                                                                                                                                      |            |            |            |            |
| Input Frequency Range           | 47-63 Hz                                                                                                                                                                                                                                                      |            |            |            |            |
| Input Current                   | 1.7A max. @ 230Vac, 1.4A max. @ 277Vac, 1.0A max. @ 480Vac                                                                                                                                                                                                    |            |            |            |            |
| Efficiency at 100% Load         | 230Vac                                                                                                                                                                                                                                                        | 88.0% typ. | 91.0% typ. | 92.0% typ. | 92.0% typ. |
|                                 | 277Vac                                                                                                                                                                                                                                                        | 88.5% typ. | 92.0% typ. | 92.5% typ. | 93.0% typ. |
|                                 | 480Vac                                                                                                                                                                                                                                                        | 89.0% typ. | 92.5% typ. | 93.0% typ. | 93.5% typ. |
| Max Inrush Current (Cold Start) | 50A typ. @ 480Vac                                                                                                                                                                                                                                             |            |            |            |            |
| Power Factor at 100% Load       | 0.98 typ. @ 230Vac & 277Vac<br>0.95 typ. @ 480Vac                                                                                                                                                                                                             |            |            |            |            |
| Total Harmonic Distortion       | <b>For 12V:</b><br>< 20% @ 230Vac/60 Hz & 277Vac/60 Hz (≥ 50% load)<br>< 20% @ 347Vac/60 Hz & 480Vac/60 Hz (≥ 80% load)<br><b>All other voltages:</b><br>< 20% @ 230Vac/60 Hz & 277Vac/60 Hz (≥ 50% load)<br>< 20% @ 347Vac/60 Hz & 480Vac/60 Hz (≥ 70% load) |            |            |            |            |
| Leakage Current                 | < 0.75mA @ 480Vac/60Hz                                                                                                                                                                                                                                        |            |            |            |            |


\* Output power is de-rated for low input voltage. Please refer to Fig. 2 on page 9.

# LED Driver


LNV-320W Series / LNV-□V320W□AA

## Power Factor Vs Output Load


LNV-12V320W□

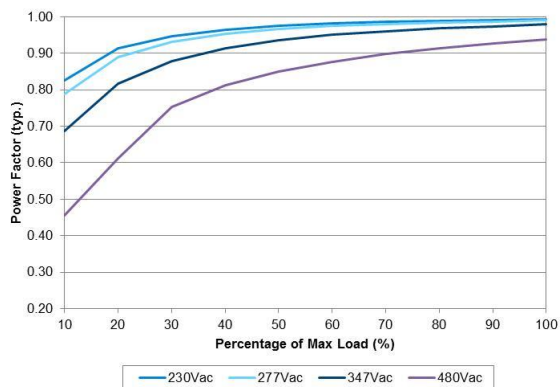


LNV-24V320W□

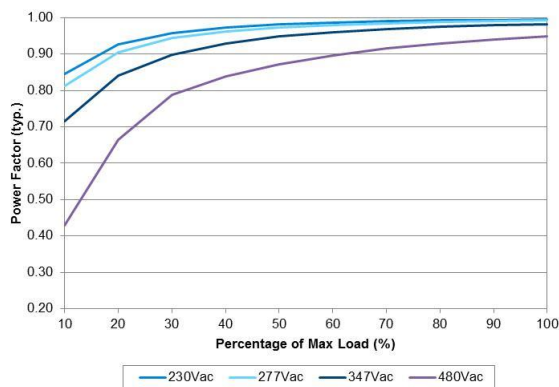

LNV-36V320W□

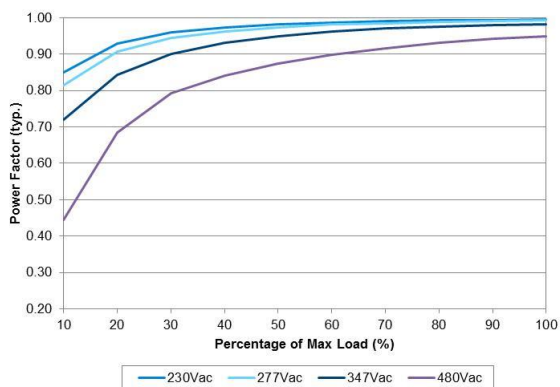

LNV-48V320W□

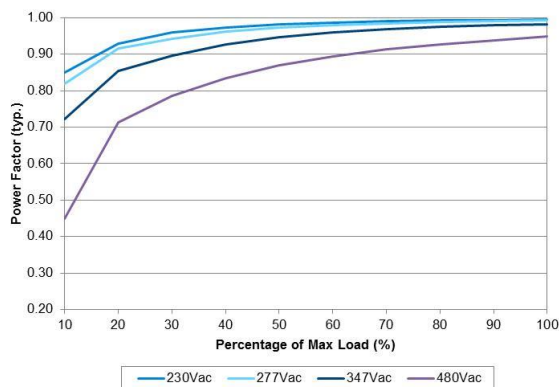


# LED Driver

LNV-320W Series / LNV-□V320W□AA




## Efficiency Vs Output Load at Nominal Output Voltage


LNV-12V320W□

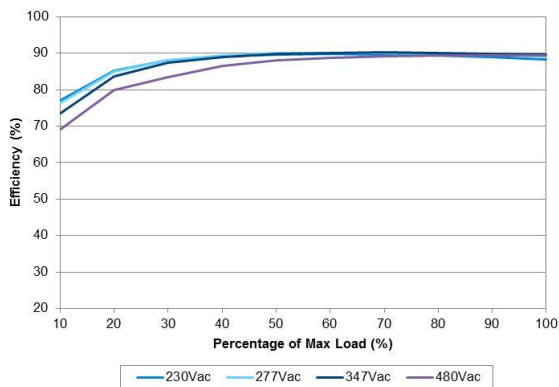


LNV-24V320W□

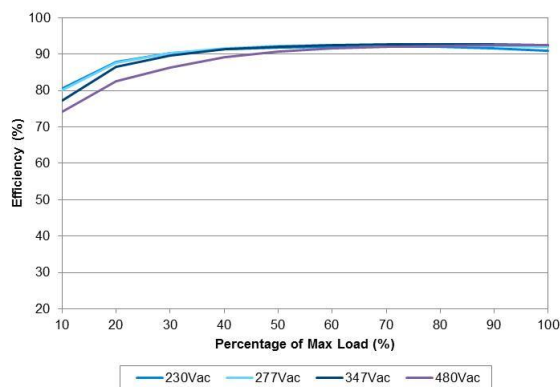

LNV-36V320W□

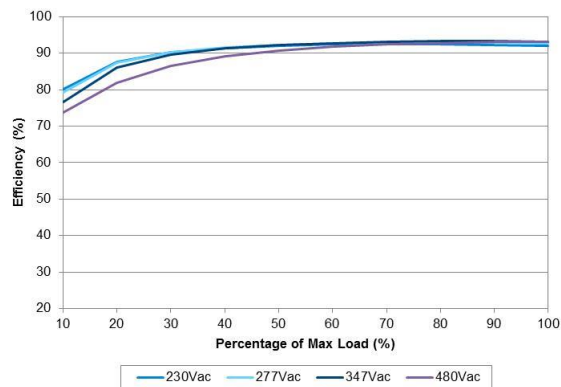

LNV-48V320W□

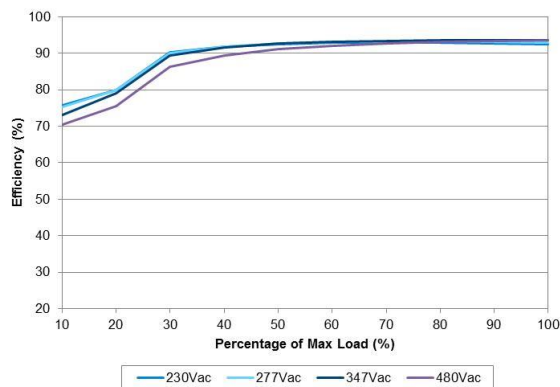

**LED Driver****LVN-320W Series / LVN-□V320W□AA**

| Model Number | LVN-12V320W□ | LVN-24V320W□ | LVN-36V320W□ | LVN-48V320W□ |
|--------------|--------------|--------------|--------------|--------------|
|--------------|--------------|--------------|--------------|--------------|

**Output Ratings / Characteristics\***

|                                                          |                                                                                                                              |             |            |            |
|----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|-------------|------------|------------|
| Nominal Output Voltage                                   | 12Vdc                                                                                                                        | 24Vdc       | 36Vdc      | 48Vdc      |
| LED System Voltage Range in CC Mode                      | 6-12Vdc                                                                                                                      | 12-24Vdc    | 18-36Vdc   | 24-48Vdc   |
| Output Voltage Adjustment Range**                        | 10.8-13.5V                                                                                                                   | 22.0-27.0V  | 33.0-40.0V | 43.0-53.0V |
| Nominal Output Current                                   | 22.50A                                                                                                                       | 13.40A      | 8.90A      | 6.70A      |
| Output Current Adjustment Range**                        | 11.25-22.5A                                                                                                                  | 6.67-13.40A | 4.45-8.90A | 3.35-6.70A |
| Output Power                                             | 270W                                                                                                                         | 320W        | 320W       | 320W       |
| Line Regulation<br>@180-528Vac                           | ± 0.5%                                                                                                                       |             |            |            |
| Load Regulation (0-95% load)<br>@180-528Vac              | ± 2.0%                                                                                                                       | ± 0.5%      | ± 0.5%     | ± 0.5%     |
| PARD*** (20 MHz)                                         | < 150mVpp                                                                                                                    | < 150mVpp   | < 250mVpp  | < 250mVpp  |
| Rise Time                                                | < 50ms @ 230Vac & 277Vac & 480Vac                                                                                            |             |            |            |
| Start-up Time                                            | < 500ms @ 230Vac                                                                                                             |             |            |            |
| Hold-up Time                                             | 16ms typ. @ 230Vac & 277Vac & 480Vac (100% load)                                                                             |             |            |            |
| Dynamic Response<br>(Overshoot & Undershoot O/P Voltage) | ± 5% @ 0-90% load, @ 230Vac & 277Vac & 480Vac<br>(Slew Rate: 0.1A/μS, 90% duty cycle @ 120Hz & 1KHz) (For CV Operation Only) |             |            |            |

\* For power de-rating, see power de-rating at Fig.1 & Fig. 2 on page 11.

\*\* For LVN-□V320WAAA package type only.

\*\*\* PARD is measured with an AC coupling mode, and in parallel with 0.1μF ceramic capacitor & 47μF electrolytic capacitor.

## LED Driver

## LNV-320W Series / LNV-□V320W□AA

| Model Number | LNV-12V320W□ | LNV-24V320W□ | LNV-36V320W□ | LNV-48V320W□ |
|--------------|--------------|--------------|--------------|--------------|
|--------------|--------------|--------------|--------------|--------------|

## Mechanical

|                                      |                                               |    |               |                                              |
|--------------------------------------|-----------------------------------------------|----|---------------|----------------------------------------------|
| Casing                               | Aluminum                                      |    |               |                                              |
| Dimensions (L x W x D)               | 262 x 90 x 43.8 mm (10.32 x 3.54 x 1.72 inch) |    |               |                                              |
| Unit Weight                          | 1.19 kg (2.62 lb)                             |    |               |                                              |
| Cooling System                       | Convection                                    |    |               |                                              |
| Wire                                 | Input                                         | UL | STW 18AWGX3C  | Line: Brown, Neutral: Blue, PE: Green/Yellow |
|                                      | Output                                        | UL | SJTW 14AWGX2C | Positive: Red, Negative: Black               |
|                                      | Dimming                                       | UL | SJTW 18AWGX2C | Positive: White, Negative: Blue              |
| Noise<br>(1 Meter from power supply) | Sound Pressure Level (SPL) < 25dBA            |    |               |                                              |

## Environment

|                                                       |                                                                                            |                                                                                                        |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| Surrounding Air Temperature                           | Operating                                                                                  | -40°C to +60°C (Vin: 180Vac)<br>-40°C to +65°C (Vin: 230Vac)<br>-40°C to +70°C (Vin: 270Vac and above) |
|                                                       | Storage                                                                                    | -40°C to +85°C                                                                                         |
| Power De-rating                                       | Vin: 180Vac                                                                                | > 50°C de-rate power by 4% / °C                                                                        |
|                                                       | Vin: 230Vac                                                                                | > 55°C de-rate power by 4% / °C                                                                        |
|                                                       | Vin: 277Vac                                                                                | > 60°C de-rate power by 4% / °C                                                                        |
|                                                       | Input                                                                                      | < 200Vac de-rate power by 1% / Vac                                                                     |
| Operating Humidity                                    | 5 to 95% RH (Non-Condensing)                                                               |                                                                                                        |
| Operating Altitude                                    | 0 to 3,000 Meters (9,840 ft.)                                                              |                                                                                                        |
| Shock Test<br>(Non-Operating)                         | IEC 60068-2-27, Half Sine Wave: 50G for a duration of 11ms, 3 shocks for each 3 directions |                                                                                                        |
| Vibration<br>(Non-Operating)                          | IEC 60068-2-6, Random: 5 Hz to 500 Hz (2.09G); 20 min per axis for all X, Y, Z direction   |                                                                                                        |
| Pollution Degree                                      | 2                                                                                          |                                                                                                        |
| Location Ratings<br>(Included in UL safety approvals) | Dry, damp, wet ratings                                                                     |                                                                                                        |
| Type H/L<br>(Included in safety approvals)            | UL Class I, Division 2 Hazardous Location                                                  |                                                                                                        |

## Protections

|                          |                                                                                                  |                        |                        |                        |
|--------------------------|--------------------------------------------------------------------------------------------------|------------------------|------------------------|------------------------|
| Overvoltage              | 13.8-16.8V, Latch Mode                                                                           | 27.6-33.6V, Latch Mode | 41.4-50.4V, Latch Mode | 55.2-67.2V, Latch Mode |
| Overload / Overcurrent   | 95-108% of rated load current, constant current limit<br>Auto-Recovery when the fault is removed |                        |                        |                        |
| Over Temperature         | Hiccup Mode, Auto-Recovery when the fault is removed                                             |                        |                        |                        |
| Short Circuit            | Constant current limit, Auto-Recovery when the fault is removed                                  |                        |                        |                        |
| Degree of Protection     | IP65 (LNV-□V320WAAA)<br>IP67 (LNV-□V320WBAA and LNV-□V320WDAA)                                   |                        |                        |                        |
| Protection Against Shock | Class I with PE* connection                                                                      |                        |                        |                        |

\*PE: Primary Earth

# LED Driver

## LNV-320W Series / LNV-□V320W□AA

| Model Number | LNV-12V320W□ | LNV-24V320W□ | LNV-36V320W□ | LNV-48V320W□ |
|--------------|--------------|--------------|--------------|--------------|
|--------------|--------------|--------------|--------------|--------------|

### Reliability Data

|                        |                                                                                                                                                                                  |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MTBF                   | > 700,000 hrs. as per Telcordia SR-332 (I/P: 200Vac, O/P: 100% load, Ta: 25°C)                                                                                                   |
| Expected Cap Life Time | 7 years (Input @ 230Vac OR 347Vac, Output @ 100% load AND CASE TEMPERATURE (tc) ≤ 75°C)<br>AND<br>10 years (Input @ 230Vac, Output @ 50% load @ AMBIENT TEMPERATURE (Ta) = 40°C) |

### Safety Standards / Directives

|                       |                  |                                                                                       |
|-----------------------|------------------|---------------------------------------------------------------------------------------|
| Electrical Safety     | UL recognized    | UL 8750 and CAN/CSA C22.2 No. 60950-1<br>(Safety approval and dry, damp, wet ratings) |
| Material and Parts    |                  | RoHS Directive 2011/65/EU Compliant                                                   |
| Galvanic Isolation    | Input to Output  | 3.85kVac                                                                              |
|                       | Input to Ground  | 2.0kVac                                                                               |
|                       | Output to Ground | 1.5kVac                                                                               |
| Insulation Resistance |                  | I/P-O/P, I/P-FG, O/P-FG : 100MΩ / 500VDC / 25°C / 70% RH                              |

### EMC

|                                   |                |                                                                                                                                  |
|-----------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------------------|
| Emissions (CE & RE)               |                | Compliance to FCC Title 47: Class B                                                                                              |
| Immunity                          |                | Compliance to EN 61547 and EN 55024                                                                                              |
| Electrostatic Discharge           | IEC 61000-4-2  | Level 4 Criteria A <sup>1)</sup><br>Air Discharge: 15kV<br>Contact Discharge: 8kV                                                |
| Radiated Field                    | IEC 61000-4-3  | Level 3 Criteria A <sup>1)</sup><br>80 MHz-1 GHz, 10V/M with 1 kHz tone / 80% modulation                                         |
| Electrical Fast Transient / Burst | IEC 61000-4-4  | Level 3 Criteria A <sup>1)</sup><br>2kV                                                                                          |
| Surge                             | IEC 61000-4-5  | Level 5 Criteria B <sup>2)</sup><br>Common Mode <sup>3)</sup> : 6kV<br>Differential Mode <sup>4)</sup> : 4kV                     |
| Conducted                         | IEC 61000-4-6  | Level 3 Criteria A <sup>1)</sup><br>150 kHz-80 MHz, 10Vrms                                                                       |
| Power Frequency Magnetic Fields   | IEC 61000-4-8  | Level 3 Criteria A <sup>1)</sup><br>10A/Meter                                                                                    |
| Voltage Dips                      | IEC 61000-4-11 | 100% dip, 0.5 cycle, Criteria A <sup>1)</sup><br>70% dip, 10 cycle, Criteria B <sup>2)</sup> @ Criteria A <sup>1)</sup> @ 230Vac |
| Harmonic Current Emission         |                | IEC/EN 61000-3-2, Class C                                                                                                        |
| Voltage Fluctuation and Flicker   |                | IEC/EN 61000-3-3                                                                                                                 |

1) Criteria A: Normal performance within the specification limits

2) Criteria B: Temporary degradation or loss of function which is self-recoverable

3) Asymmetrical: Common mode (Line to earth)


4) Symmetrical: Differential mode (Line to line)

# LED Driver


## LVN-320W Series / LVN-□V320W□AA

### Block Diagram

LVN-□V320WAAA and LVN-□V320WBAA

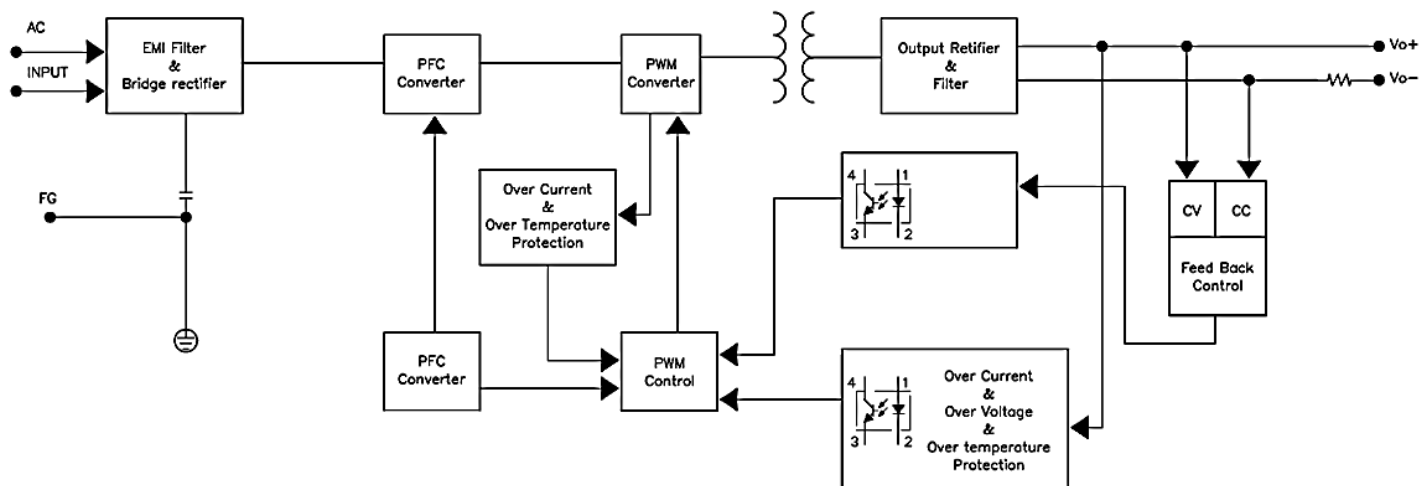

LVN-□V320WDAA

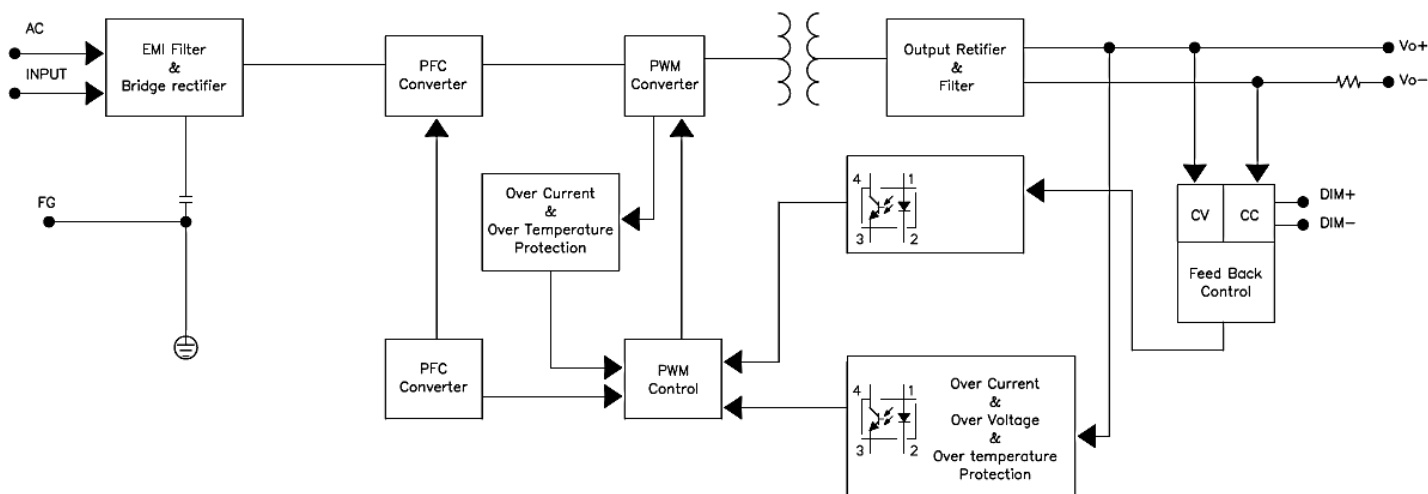




**LED Driver**

LNV-320W Series / LNV-□V320W□AA


**Dimensions**

L x W x D: 262 x 90 x 43.8 mm (10.32 x 3.54 x 1.72 inch)

LNV-□V320WAAA (IP65 with potentiometers to adjust output voltage &amp; constant current level)

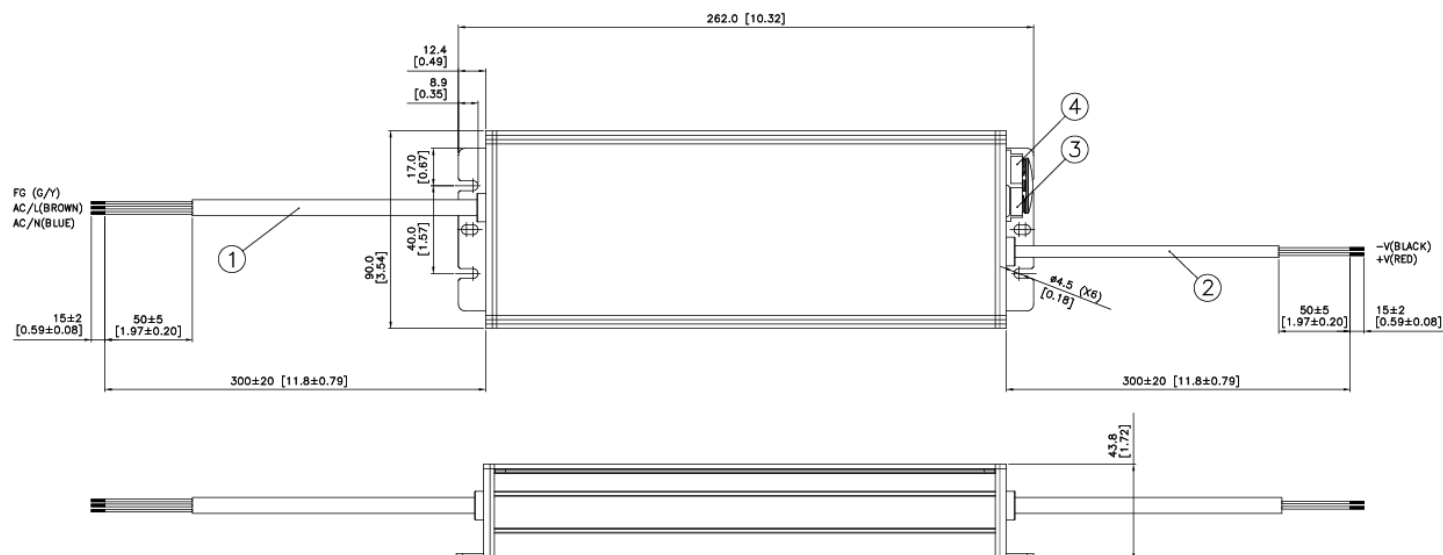

LNV-□V320WBAA (IP67 without dimming cable &amp; potentiometers)

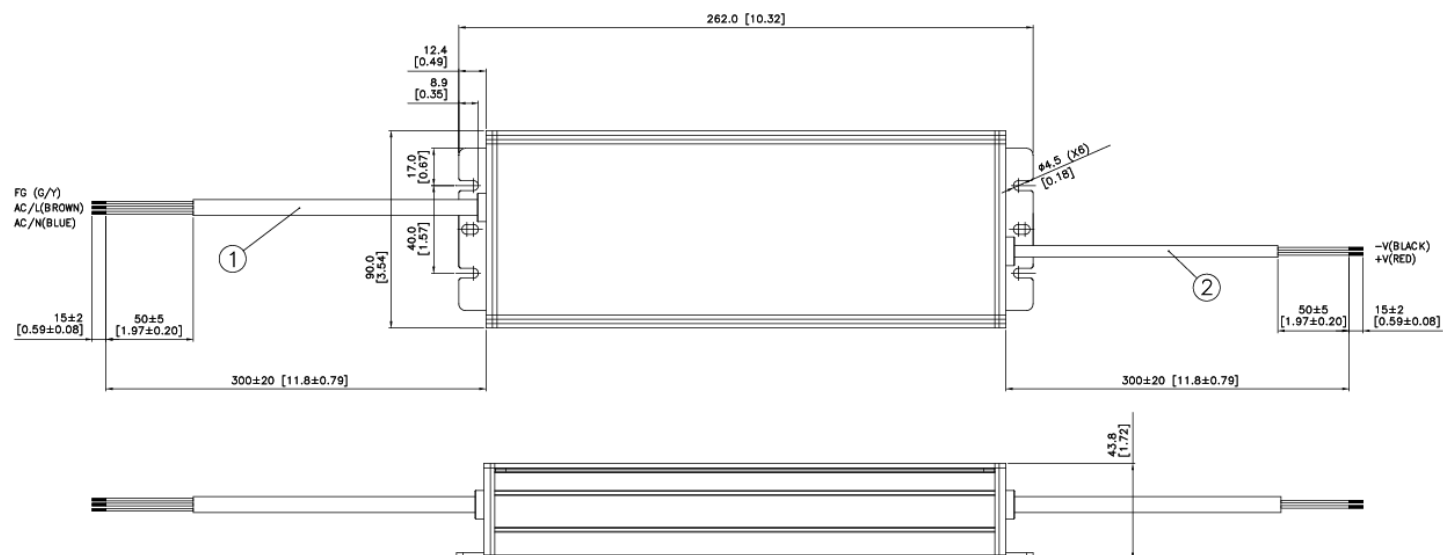


| Item | Device Description                        |
|------|-------------------------------------------|
| 1    | Input cable                               |
| 2    | Output cable                              |
| 3    | Constant voltage adjustment potentiometer |
| 4    | Constant current adjustment potentiometer |

**LED Driver**

LNV-320W Series / LNV-□V320W□AA


LNV-□V320WDAA (IP67 with dimming cable to adjust constant current level)

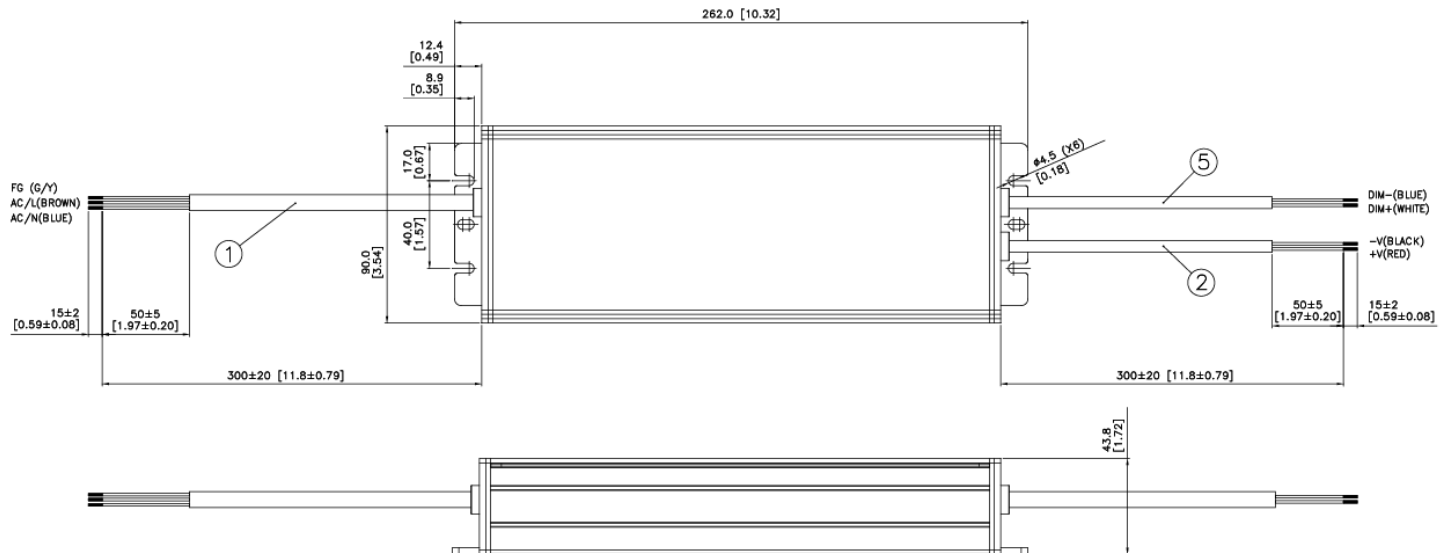

| Item | Device Description                        |
|------|-------------------------------------------|
| 1    | Input cable                               |
| 2    | Output cable                              |
| 3    | Constant voltage adjustment potentiometer |
| 4    | Constant current adjustment potentiometer |
| 5    | Dimming Cable                             |

**LED Driver**


LNV-320W Series / LNV-□V320W□AA

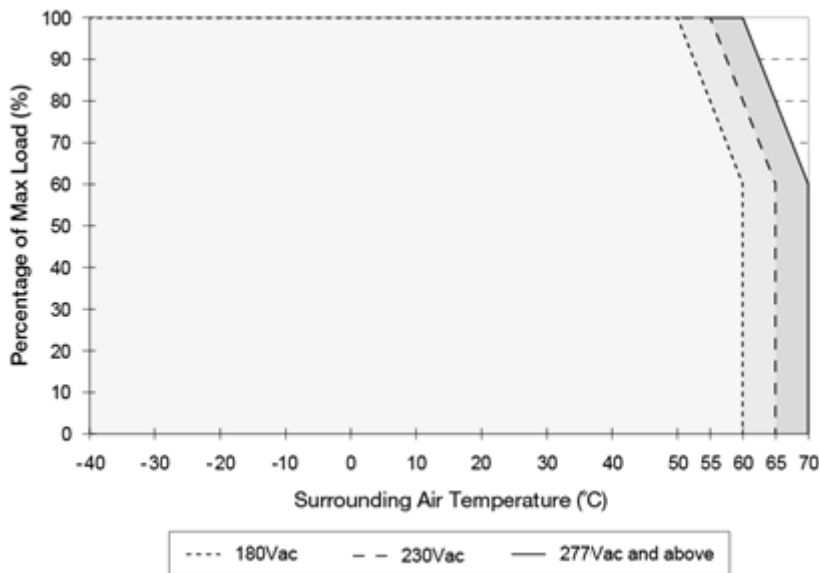**Engineering Data****Output Load De-rating VS Surrounding Air Temperature**

**Fig. 1 De-rating for All Mounting Orientation (All Models)**  
 > 50°C de-rate power by 4% / °C, @ 180Vac  
 > 55°C de-rate power by 4% / °C, @ 230Vac  
 > 60°C de-rate power by 4% / °C, @ 277Vac and above

**Note**

1. Power supply components may degrade, or be damaged, when the power supply is continuously used outside the shaded region, refer to the graph shown in Fig. 1.
2. If the output capacity is not reduced when the surrounding air temperature >60°C, the device will run into Over Temperature Protection. When activated, the output voltage will go into bouncing mode and will recover when the surrounding air temperature is lowered or the load is reduced as far as necessary to keep the device in working condition.
3. Depending on the surrounding air temperature and output load delivered by the power supply, the device can be very hot!

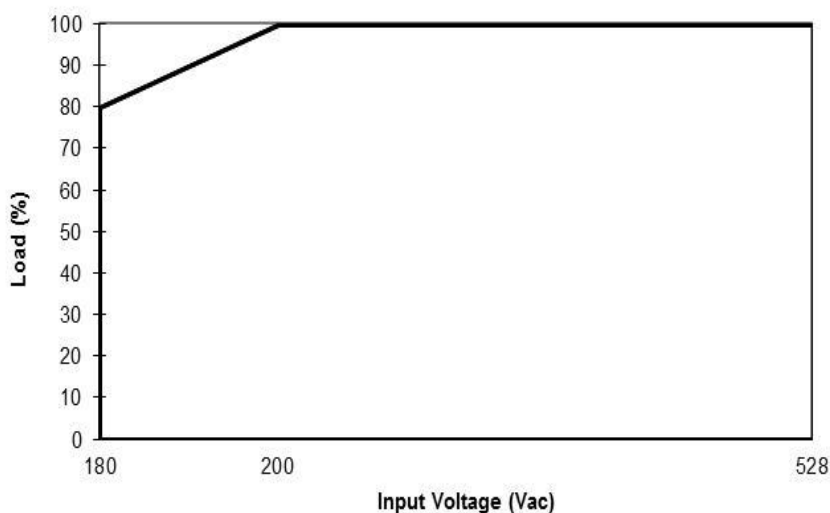**Output Load De-rating VS Input Voltage**

**Fig. 2 De-rating for Low Input Voltage (All Models)**  
 < 200Vac de-rate power by 1% / Vac


■ No output power de-rating for the input voltage range from 200-528Vac

■ L Frame / Enclosed

# LED Driver

## LVN-320W Series / LVN-□V320W□AA

### Output Load VS LED Driver Case Temperature

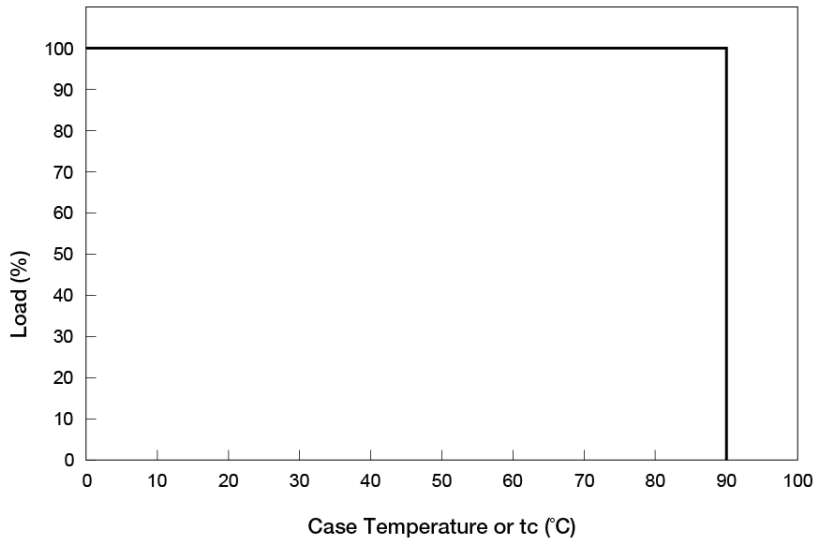

- The LED Driver can support 100% rated load for case hot spot surface temperatures of less than 90°C.

# LED Driver

## LVN-320W Series / LVN-□V320W□AA

### Assembly & Installation

Mounting holes for LED driver assembly onto the mounting surface.

|      |                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ①, ② | Mounting holes for the LED driver (device). There are 3 mounting holes at either end of the device (locations ① and ② in Fig. 3). The device shall be mounted using a minimum of 2 out of the 3 mounting holes on both sides. Mounting shall be done using M4 screws with minimum length of 5mm. If customer's end system or panel where the device is mounted does not have screw threads, please use suitable metal screw and nut to secure the device. |
| ③    | Surface ③ belongs to customer's end product or panel where the device is mounted. The device should be mounted on a sturdy heat conducting surface with minimum of 4 mounting holes, as detailed above.                                                                                                                                                                                                                                                   |



Fig. 3 Mounting Hole Locations

### Safety Instructions

- ALWAYS switch mains of input power OFF before connecting and disconnecting the input voltage to the device. If mains are not turned OFF, there is risk of explosion / severe damage.
- To guarantee sufficient convection cooling, keep a distance of 50mm above and lateral distance to nearby objects.
- The device is not recommended to be placed on low thermal conductive surfaces. For example, plastics.
- DO NOT insert any objects into the device.
- Note that the enclosure of the device can become very hot depending on the surrounding air temperature and output load connected to the device. Risk of burns!
- If the device is continuously operating outside the shaded region shown in Fig. 1. The device may be damaged or degraded.
- When the PE (Green/Yellow) wire of the device is not connected, the device must be installed on a metal plate that has a PE connection.
- The current rating for the all wires, connected to the input and output wires of the device, must be rated higher than or equal to the input and output current of the power supply. Please refer to the product specifications.
- For device with dimming function, always ensure the dimming control is working properly.
- Please ensure the correct tools are used for all adjustments and installations of the device. If in doubt, please consult your local Delta support or contact us via [info@DeltaPSU.com](mailto:info@DeltaPSU.com).

# LED Driver

## LNV-320W Series / LNV-□V320W□AA

### Functions

#### Start-up Time

The time required for the output voltage to reach 90% of its final steady state set value, after the input voltage is applied.


#### Rise Time

The time required for the output voltage to change from 10% to 90% of its final steady state set value.

#### Hold-up Time


Time between the collapse of the AC input voltage, and the output falling to 95% of its steady state set value.

#### ■ Graph illustrating the Start-up Time, Rise Time, and Hold-up Time

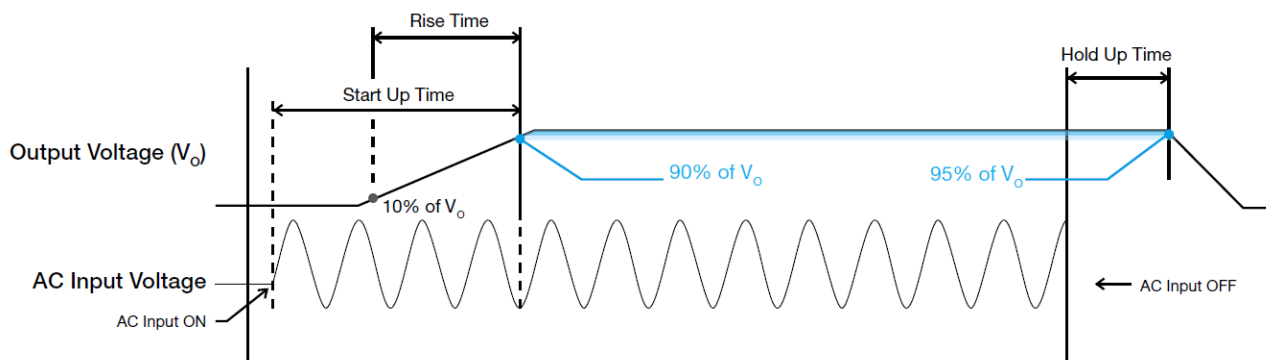

#### Inrush Current


Inrush current is the peak, instantaneous, input current measured and, occurs when the input voltage is first applied. For AC input voltages, the maximum peak value of inrush current will occur during the first half cycle of the applied AC voltage. This peak value decreases exponentially during subsequent cycles of AC voltage.

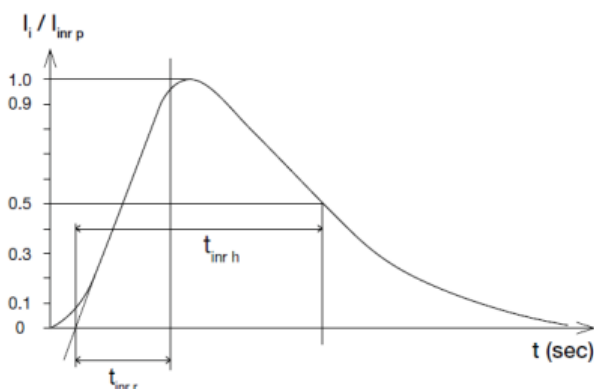


#### Dynamic Response (For CV Operation Only)

The power supply output voltage will remain within  $\pm 5\%$  of its steady state value, when subjected to a dynamic load from 0 to 90% of its rated current.

#### ■ 90% Duty / 1 KHz

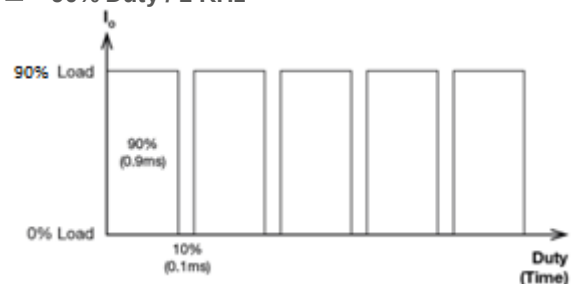


#### ■ 90% Duty / 120 Hz

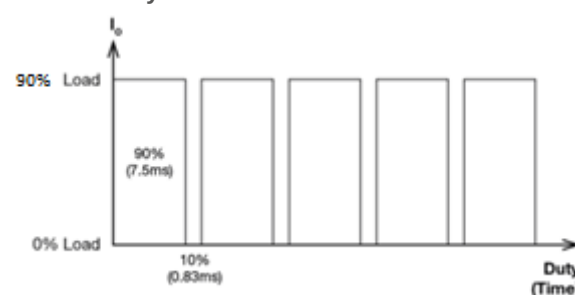

## LED Driver

LNV-320W Series / LNV-□V320W□AA

## Operating Methods of LED Modules-CV and CC Operation

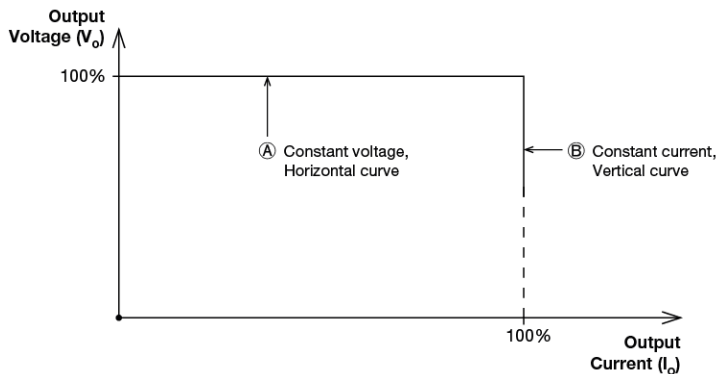


A typical LED power supply is able to either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs. Delta's LNE drivers integrate CV+CC characteristics; so operation in CV mode (with external LED driver), in region (A) or CC mode (direct drive, at area (B)).

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues or other questions with these adjustment methods, please contact with Delta.


## Dimming Operations

This operation is available for LNV-□V320WDAA only. The Dimming connection diagram for turning the lighting fixture ON/OFF can be configured as below.

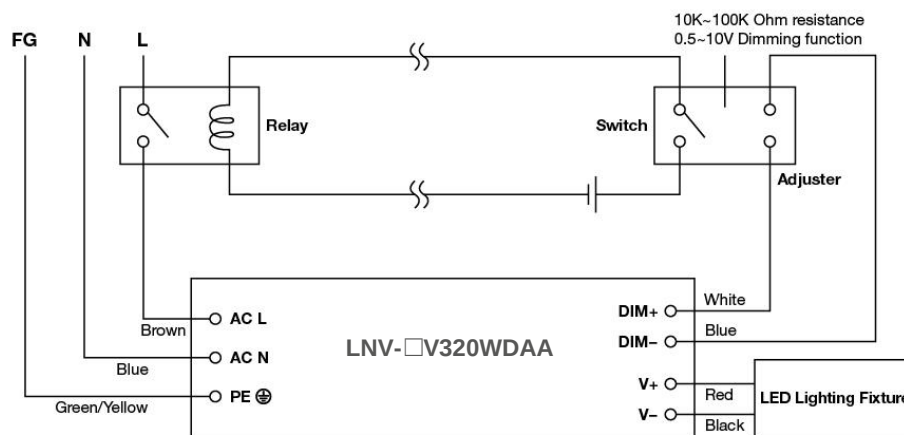


Please refer an example of reference configuration as follows.

1. Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable that has the white and blue wires, by connecting a resistance in the range of 10-100 kilo-ohms, a DC voltage of 0.5-10Vdc or a 10V PWM signal between DIM+ and DIM-.
2. External voltage source used to control dimming current must be capable of providing 100 micro-amperes of current.
3. The LED lighting fixture can be turned ON/OFF by the switch.
4. Please DO NOT connect "DIM-" to "V-".
5. Reference resistance value for output current adjustment (Typical).

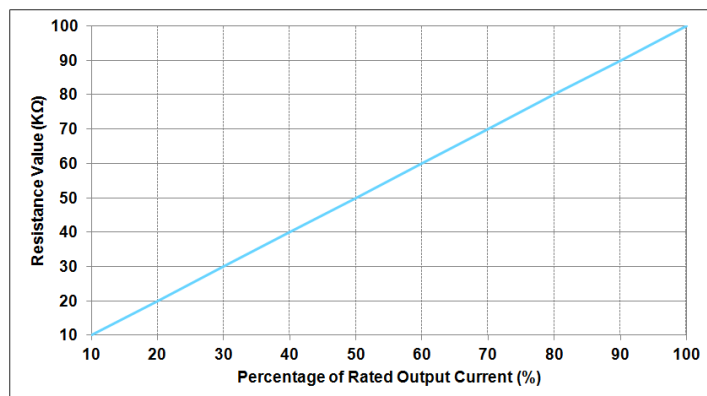


**LED Driver****LVN-320W Series / LVN-□V320W□AA**

6. 0.5 ~ 10V dimming function for output current adjustment (Typical).

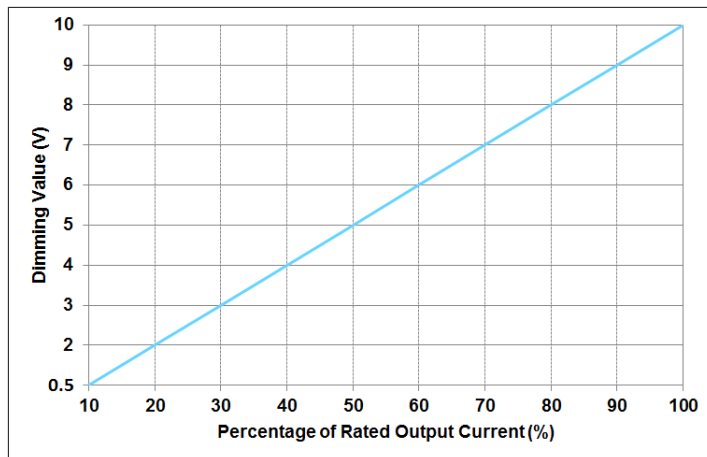

7. 10V PWM signal for output current adjustment is also possible. For additional information, please contact your Delta sales representative.
8. Please note that LVN-□V320WDAA can't turn the lighting fixture completely off (totally dark) by using any of these dimming adjustment methods. To completely turn off the lighting fixture, the input AC voltage must be removed. See illustration on previous page.
9. The LED driver can also be used for parallel operation in order to increase the output power. Dimming cable is allowed to connect with common Adjuster for 0.5 ~ 10V dimming function and 10V PWM signal. The connection can be configured as below. The combined power of the two units connected in parallel shall not exceed 486W for the 12V model, and 576W for all other output voltage models.

Parameters such as EMI, inrush current, leakage current, PARD, start-up time will be different from those on the datasheet, when two units are connected in parallel. The user will need to verify that any differences will still allow the two power supplies connected in parallel will work properly in their product/application.

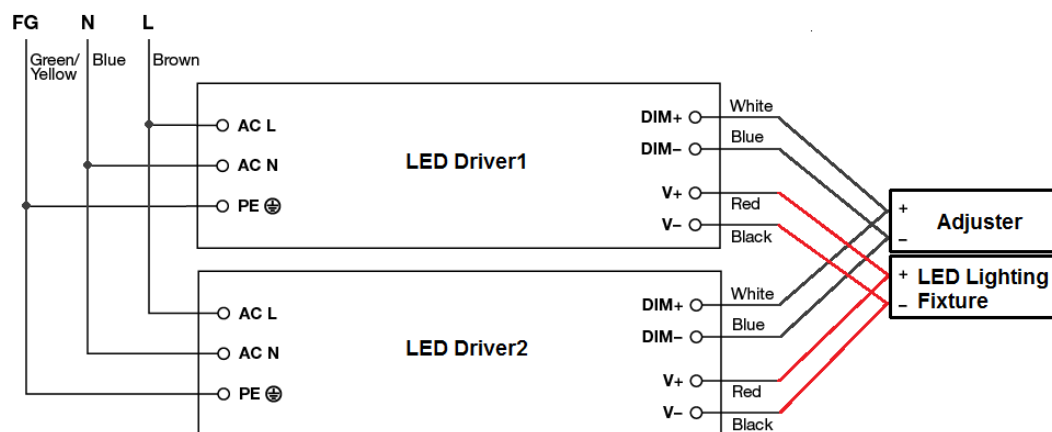**External Input Protection Device**

The unit is protected with internal fuses on the Line and Neutral input paths that cannot be replaced. The power supply has been tested and approved on 20A branch circuits without additional protection device. An external protection device is only required if the supplying branch has an ampacity greater than above. Thus, if an external protective device is necessary, a 20 Ampere C-characteristic circuit breaker can be utilized.




## LED Driver

## LNV-320W Series / LNV-□V320W□AA

## Overload &amp; Overcurrent Protections (Auto-Recovery)

The power supply's Overload (OLP) and Overcurrent (OCP) Protections will be activated when output current is between 95% and 108% of  $I_o$  (Max load). Upon such an occurrence, the  $V_o$  (output voltage) will start to droop. Once the power supply has reached its maximum power limit, the protection will be activated; and, the power supply will operate in "CC mode". The power supply will recover once the fault condition once the cause of OLP or OCP is removed, and  $I_o$  (output current) is back within the specified range.

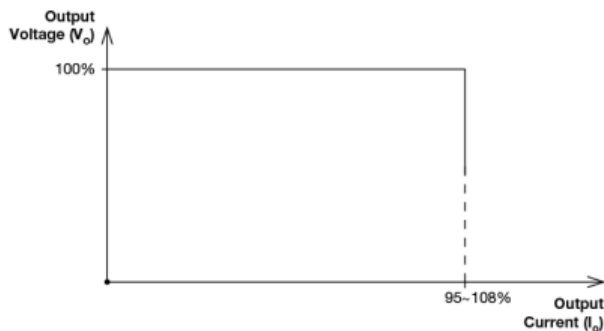


## Short Circuit Protection (Auto-Recovery)

The power supply's output OLP/OCP function also provides protection against short circuits. When a short circuit is applied, the power supply will operate in "CC mode", as shown in the illustration in the OLP/OCP section on this page. The power supply will return to normal operation after the short circuit is removed.

## Overvoltage Protection (Latch Mode)

The power supply's overvoltage circuit will be activated when its internal feedback circuit fails. The output voltage shall not exceed its specifications as described in "Protections" section. Power supply will latch, and require removal/re-application of input AC voltage in order to restart.

The power supply should be latch.

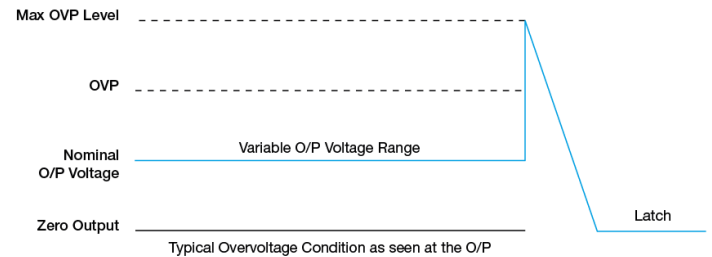

## Over Temperature Protection (Auto-Recovery)

As described in load de-rating section, the power supply also has Over Temperature Protection (OTP). In the event of a higher operating temperature at 100% load, the power supply will run into OTP when the operating temperature is beyond what is recommended in the de-rating graph. When activated, the output voltage will go into bouncing mode until the temperature drops to its normal operating temperature as recommended in the de-rating graph.

## Others

## Delta RoHS Compliant




## Restriction of the usage of hazardous substances

The European directive 2011/65/EU limits the maximum impurity level of homogeneous materials such as lead, mercury, cadmium, chrome, polybrominated flame retardants PBB and PBDE for the use in electrical and electronic equipment. RoHS is the abbreviation for "Restriction of the use of certain hazardous substances in electrical and electronic equipment".

This product conforms to this standard.

## PFC – Norm EN 61000-3-2

## Line Current Harmonic content



Typically, the input current waveform is not sinusoidal due to the periodical peak charging of the input capacitor. In industrial environment, complying with EN 61000-3-2 is only necessary under special conditions. Complying to this standard can have some technical drawbacks, such as lower efficiency as well as some commercial aspects such as higher purchasing costs. Frequently, the user does not profit from fulfilling this standard, therefore, it is important to know whether it is mandatory to meet this standard for a specific application.

## Attention

Delta provides all information in the datasheets on an "AS IS" basis and does not offer any kind of warranty through the information for using the product. In the event of any discrepancy between the information in the catalog and datasheets, the datasheets shall prevail (please refer to [www.DeltaPSU.com](http://www.DeltaPSU.com) for the latest datasheets information). Delta shall have no liability of indemnification for any claim or action arising from any error for the provided information in the datasheets. Customer shall take its responsibility for evaluation of using the product before placing an order with Delta.

Delta reserves the right to make changes to the information described in the datasheets without notice.